

First Spanish brand of industrial digital printing



V6 Lite

Online digital printing of GHS labels

Two colors in one machine

Direct printing on the packaging

Reduction of operational costs

Print small texts

Barcodes in GS-1 standard

CLP labels

End-of-line customization

Digital printing for industry 4.0




CHARACTERISTICS

- Native resolution of 180dpi up to 60m/min
- Multiple densities and contrasts
- High quality bar codes. GS-1 standard
- Intuitive user environment
- Actual on-screen preview of the message to be printed (WYSIWYG)
- Oil based and UV LED inks
- Remote assistance
- External hardware message selection
- Integration with post-print bar code reader
- Scripting for full customisation of jobs

ADVANTAGES

- Customisation. Short print runs. Promotions
- Reduction of stock of pre-printed containers
- Practically zero maintenance
- No stoppages to change consumables

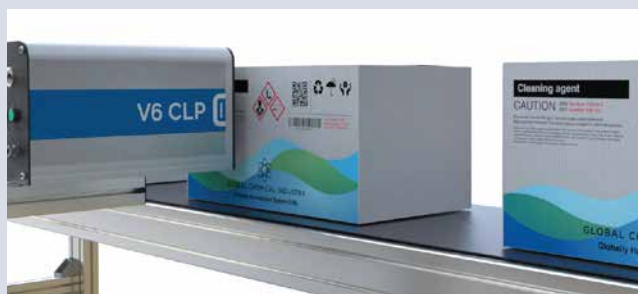

SPECIFICATIONS

PRINT

Print head resolution:
180 dpi

Speed:
0.2-192 m/min depending resolution

Height:
72 mm / 140 mm

Maximum length: +100 m.

Densities: 3 levels

Font type: True Type™, Open Type™ fonts

Character coding: Unicode

Bar codes: GS-1 standard
EAN/UPC, ITF-14, GS1-128, GS1 Data-matrix, GS1 QR Code

Printing of variable fields:
Of user (customised fields) and auto-matic fields (expiry dates, shift codes, counters)

Encoder:
Automatic speed calibration

ENVIRONMENTAL

Work environment:
5 - 45 °C (41 - 1113 °F)

Protection:
IP 50

COMMUNICATIONS

Own communications protocol
Windows™ Driver
Connectivity with external database and ERP Remote assistance

ELECTRICS

Power supply:
Selectable by switch
88-264VAC / 47-63 Hz, 108 W (max)

Inputs (per block):
1 x printing signal
1 x encoder

Outputs (per block):
2 x programmable
2 x status indicators

Communication ports:
1 x RS-232
1 x RS-422 / 485 / 232 (optional)
1 x Ethernet 1Gb
1 x USB
1 x WiFi (optional)

UV LED



Printing immediately sets Useful, long life span with low maintenance Energy efficient

Several heights available
Instant on/off
Safety through double activation input
Adjustable intensity

INKS

Oil-based and UV LED inks - MOF Colors:
Black, Black (high contrast), Cyan, Magenta, Yellow, Others (consult)



USER INTERFACE

7" colour touchscreen
Selection of messages with preview
WYSIWYG
Diagnostics

OPTIONS

Post-printing bar code verification, alarm beacons, bar code reader for selecting products, external hardware message selection

PRINTABLE PRODUCTS

Porous, glossy, coated cardboard, paper, textiles, wood, plastic, metal, foam, EPS

CONFIGURATIONS

V6 Lite 70:
180 dpi
70 mm
Mono



V6 Lite 140:
180 dpi
140 mm
Mono




V6 Lite CLP 70:
180 dpi
70/70 mm
2 Colors



Orientation options:

Lateral - Upjet - Downjet

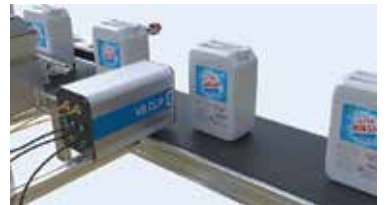

ARROW DIGITAL PVT. LTD.

1005-1006, Aditya - 10th Floor, Opp. Sardar Patel Seva Samaj, Off. C G Road, Mithakhali, Navrangpura, Ahmedabad - 380006. Gujarat - India.

Tel.: +91 79 26404017 / 18, +91 79 26405048 / 49

Demo Center - Ahmedabad

Branches : Ahmedabad, Bengaluru, Delhi, Indore, Kolkata, Mumbai, Pune, Surat



www.arrow-digital.com

sales@arrow-digital.com